


FEATURES

- Bartenbach reflector technology
- Architectural design
- Low UGR

Bartenbach
lighting optics

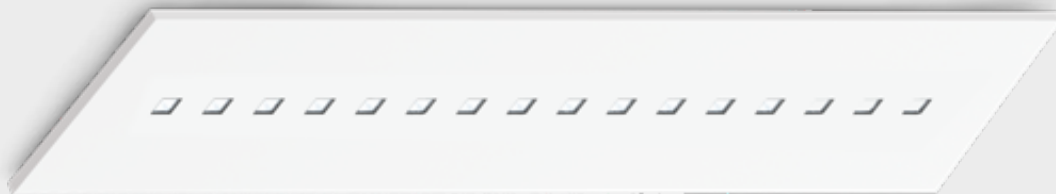

Aviora FL 1195x295 (Gen2) LV

SPECIFICATIONS

Colour	Matt white RAL 9016 (=MW)
Beam angle (FWHM)	Standard 85° (100° FWTM) / On request 75° (95° FWTM)
UGR (4H8H 70/50/20)	<19
Fixture material	Housing: Steel / Reflector glass: Polycarbonate
Environment	Indoor
IK rate	IK03
Operating temperature (Ta)	-20°C / +45°C ¹
Safety marks	EN60598 / EN62031 / EN 62471
EMC compliance	EN55015
Colour consistency (SDCM)	MacAdam step 3
Warranty	7 years * (within the European Union and the countries of the Free Trade Association for products delivered after 1 May 2015)
Energy class	A+

This luminaire contains built-in LED lamps. There are no exchangeable parts inside the luminaire. EU 874/2012

¹ In applications with a flat roof (fi. car showrooms) the temperatures may exceed 45°C. Please ask our sales office for a special driver.



ITEM SPECIFICATIONS (PART A)

Description	Item code	Extra	Input	W	Lm	Lm/W	CRI (typ.)	UGR	Pf	Ripple	Inrush current	B-16A Fuse
Aviora FL 1195x295 Gen2 3100Lm 3000K No dim	38C403MWSXA02	Incl. PSU	220-240V	23,8	3100	130	83	14,8	0,95	≤ 3%	5A 50µsec	50 pcs
Aviora FL 1195x295 Gen2 3100Lm 3000K 1-10V & Push	38C403MWSXE02	Incl. PSU	220-240V	23,8	3100	130	83	14,8	0,95	≤ 3%	5A 50µsec	50 pcs
Aviora FL 1195x295 Gen2 3100Lm 3000K Dali	38C403MWSXC02	Incl. PSU	220-240V	23,8	3100	130	83	14,8	0,95	≤ 3%	5A 50µsec	50 pcs
Aviora FL 1195x295 Gen2 4300Lm 3000K No dim	38C403MWSG02	Incl. PSU	220-240V	33,6	4300	128	83	16	0,95	≤ 3%	5A 50µsec	50 pcs
Aviora FL 1195x295 Gen2 4300Lm 3000K 1-10V & Push	38C403MWSM02	Incl. PSU	220-240V	33,6	4300	128	83	16	0,95	≤ 3%	5A 50µsec	50 pcs
Aviora FL 1195x295 Gen2 4300Lm 3000K Dali	38C403MWSK02	Incl. PSU	220-240V	33,6	4300	128	83	16	0,95	≤ 3%	5A 50µsec	50 pcs
Aviora FL 1195x295 Gen2 6200Lm 3000K No dim	38C403MWSR02	Incl. PSU	220-240V	51,0	6200	122	83	17,1	0,95	≤ 3%	20A 400µsec	15 pcs
Aviora FL 1195x295 Gen2 6200Lm 3000K 1-10V & Push	38C403MWSR02	Incl. PSU	220-240V	51,0	6200	122	83	17,1	0,95	≤ 3%	10A 200µsec	30 pcs
Aviora FL 1195x295 Gen2 6200Lm 3000K Dali	38C403MWSV02	Incl. PSU	220-240V	51,0	6200	122	83	17,1	0,95	≤ 5%	<100mA²s	22 pcs
Aviora FL 1195x295 Gen2 3250Lm 4000K No dim	38C403MWSXB02	Incl. PSU	220-240V	23,8	3250	137	83	14,9	0,95	≤ 3%	5A 50µsec	50 pcs
Aviora FL 1195x295 Gen2 3250Lm 4000K 1-10V & Push	38C403MWSXF02	Incl. PSU	220-240V	23,8	3250	137	83	14,9	0,95	≤ 3%	5A 50µsec	50 pcs
Aviora FL 1195x295 Gen2 3250Lm 4000K Dali	38C403MWSXD02	Incl. PSU	220-240V	23,8	3250	137	83	14,9	0,95	≤ 3%	5A 50µsec	50 pcs
Aviora FL 1195x295 Gen2 4500Lm 4000K No dim	38C403MWSH02	Incl. PSU	220-240V	33,6	4500	134	83	16	0,95	≤ 3%	5A 50µsec	50 pcs
Aviora FL 1195x295 Gen2 4500Lm 4000K 1-10V & Push	38C403MWSN02	Incl. PSU	220-240V	33,6	4500	134	83	16	0,95	≤ 3%	5A 50µsec	50 pcs
Aviora FL 1195x295 Gen2 4500Lm 4000K Dali	38C403MWSL02	Incl. PSU	220-240V	33,6	4500	134	83	16	0,95	≤ 3%	5A 50µsec	50 pcs
Aviora FL 1195x295 Gen2 6500Lm 4000K No dim	38C403MWSR02	Incl. PSU	220-240V	51,0	6500	127	83	17,3	0,95	≤ 3%	20A 400µsec	15 pcs
Aviora FL 1195x295 Gen2 6500Lm 4000K 1-10V & Push	38C403MWSR02	Incl. PSU	220-240V	51,0	6500	127	83	17,3	0,95	≤ 3%	10A 200µsec	30 pcs
Aviora FL 1195x295 Gen2 6500Lm 4000K Dali	38C403MWSV02	Incl. PSU	220-240V	51,0	6500	127	83	17,3	0,95	≤ 5%	<100mA²s	22 pcs
Aviora FL 1195x295 3450Lm 2700-6500K Dali	38DH03MWS6T02	Incl. PSU	220-240V	26,6	3450	139	83	17,2	0,9	≤ 5%	< 200mA²s	22 pcs
Aviora FL 1195x295 3450Lm 2700-6500K Casambi	38DH03MWS6U02	Incl. PSU	220-240V	26,6	3450	139	83	17,2	0,9	≤ 5%	< 200mA²s	22 pcs

ITEM SPECIFICATIONS (PART B)

Description	Safety class	Energy class	Weight	Dimensions single carton	Quantity per pallet	Expected lifespan (25°C)		
						L70B10	L80B10	L90B10
Aviora FL 1195x295 Gen2 3100Lm 3000K No dim	II	A+	3860 gr	1210x310x90 mm	120 pcs	>100.000 hrs	>100.000 hrs	54.000 hrs
Aviora FL 1195x295 Gen2 3100Lm 3000K 1-10V & Push	II	A+	3860 gr	1210x310x90 mm	120 pcs	>100.000 hrs	>100.000 hrs	54.000 hrs
Aviora FL 1195x295 Gen2 3100Lm 3000K Dali	II	A+	3860 gr	1210x310x90 mm	120 pcs	>100.000 hrs	>100.000 hrs	54.000 hrs
Aviora FL 1195x295 Gen2 4300Lm 3000K No dim	I	A+	3860 gr	1210x310x90 mm	120 pcs	>100.000 hrs	>100.000 hrs	54.000 hrs
Aviora FL 1195x295 Gen2 4300Lm 3000K 1-10V & Push	II	A+	3860 gr	1210x310x90 mm	120 pcs	>100.000 hrs	>100.000 hrs	54.000 hrs
Aviora FL 1195x295 Gen2 4300Lm 3000K Dali	II	A+	3860 gr	1210x310x90 mm	120 pcs	>100.000 hrs	>100.000 hrs	54.000 hrs
Aviora FL 1195x295 Gen2 6200Lm 3000K No dim	II	A+	3860 gr	1210x310x90 mm	120 pcs	>100.000 hrs	>100.000 hrs	54.000 hrs
Aviora FL 1195x295 Gen2 6200Lm 3000K 1-10V & Push	II	A+	3860 gr	1210x310x90 mm	120 pcs	>100.000 hrs	>100.000 hrs	54.000 hrs
Aviora FL 1195x295 Gen2 6200Lm 3000K Dali	I	A+	3860 gr	1210x310x90 mm	120 pcs	>100.000 hrs	>100.000 hrs	54.000 hrs
Aviora FL 1195x295 Gen2 3250Lm 4000K No dim	II	A+	3860 gr	1210x310x90 mm	120 pcs	>100.000 hrs	>100.000 hrs	54.000 hrs
Aviora FL 1195x295 Gen2 3250Lm 4000K 1-10V & Push	II	A+	3860 gr	1210x310x90 mm	120 pcs	>100.000 hrs	>100.000 hrs	54.000 hrs
Aviora FL 1195x295 Gen2 3250Lm 4000K Dali	II	A+	3860 gr	1210x310x90 mm	120 pcs	>100.000 hrs	>100.000 hrs	54.000 hrs
Aviora FL 1195x295 Gen2 4500Lm 4000K No dim	I	A+	3860 gr	1210x310x90 mm	120 pcs	>100.000 hrs	>100.000 hrs	54.000 hrs
Aviora FL 1195x295 Gen2 4500Lm 4000K 1-10V & Push	II	A+	3860 gr	1210x310x90 mm	120 pcs	>100.000 hrs	>100.000 hrs	54.000 hrs
Aviora FL 1195x295 Gen2 4500Lm 4000K Dali	II	A+	3860 gr	1210x310x90 mm	120 pcs	>100.000 hrs	>100.000 hrs	54.000 hrs
Aviora FL 1195x295 Gen2 6500Lm 4000K No dim	II	A+	3860 gr	1210x310x90 mm	120 pcs	>100.000 hrs	>100.000 hrs	54.000 hrs
Aviora FL 1195x295 Gen2 6500Lm 4000K 1-10V & Push	II	A+	3860 gr	1210x310x90 mm	120 pcs	>100.000 hrs	>100.000 hrs	54.000 hrs
Aviora FL 1195x295 Gen2 6500Lm 4000K Dali	I	A+	3860 gr	1210x310x90 mm	120 pcs	>100.000 hrs	>100.000 hrs	54.000 hrs
Aviora FL 1195x295 3450Lm 2700-6500K Dali	I	A+	3860 gr	1210x310x90 mm	120 pcs	>100.000 hrs	>100.000 hrs	54.000 hrs
Aviora FL 1195x295 3450Lm 2700-6500K Casambi	I	A+	3860 gr	1210x310x90 mm	120 pcs	>100.000 hrs	>100.000 hrs	54.000 hrs

All values are measured at 230V (+/- 7%)

CHOOSE YOUR LUMEN OUTPUT

Item	mA	W	Lumen Output		Lumen / Watt		UGR chrome		Driver types			
			3000K	4000K	3000K	4000K	3000K	4000K	No dim	1-10V&Push	Dali	Casambi
Standard	500	23,8	3100	3250	130	137	14,8	14,9	127570	125421	127576	127630
<i>Special request</i>	600	28,6	3700	3900	129	136	15,3	15,5	127480N	125421	123424	127630
Standard	700	33,6	4300	4500	128	134	16,0	16,0	127480N	125421	123424	127630
<i>Special request</i>	900	43,5	5500	5800	126	133	16,7	16,9	122204	125421	ECO560A	x
Standard	1050	51,0	6200	6500	122	127	17,1	17,3	122204	127413	ECO560A	x

DIMENSIONS

