

Verbatim LED Tube T8 G13 1200mm 18W 2200lm 3000K

- G13 Socket
- 220-240V
- 70,000 hours Lifetime
- Luminous Flux: 2200 lm

Product Number **52706**

General Data

Lamp Socket	G13
Design	LED T8 Tube

Electric Data

Wattage (W)	18
Voltage (V)	220-240
Dimmable	no
Power Factor	>0.9
Operating Frequency (Hz)	50-60

Geometric Data

Length (mm)	1212
Diameter (mm)	28
Weight (g)	270

Photometric Data

Luminous Flux (lm)	2200
CRI	80
CCT (K)	3000
Beam Angle (°)	130
Luminous Efficacy (lm/W)	122.22
Lifetime (hrs)	70,000
Switching Cycle	100,000
Operating Temperature	-40 - +45°C



04/03/2016

Lifestyle image




Technical Drawings

1213mm**Ø28mm**

04/03/2016

Photometric Diagrams

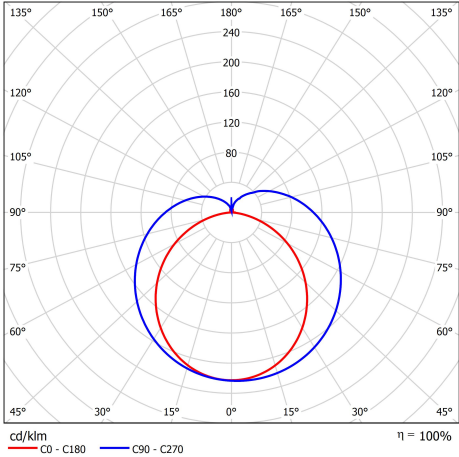


0.5	2.75 1.36	E(0°) E(C90) E(C0)	2087 42 218
1.0	5.49 2.71	E(0°) E(C90) E(C0)	522 10 55
1.5	8.24 4.07	E(0°) E(C90) E(C0)	232 5 24
2.0	10.99 5.43	E(0°) E(C90) E(C0)	130 3 14
2.5	13.74 6.78	E(0°) E(C90) E(C0)	83 2 9
3.0	16.48 8.14	E(0°) E(C90) E(C0)	58 1 6

Distance [m] Cone Diameter [m] Illuminance [lx]

— C0 - C180 (Half-value Angle: 107.2°)
— C90 - C270 (Half-value Angle: 140.0°)

Energy Rating

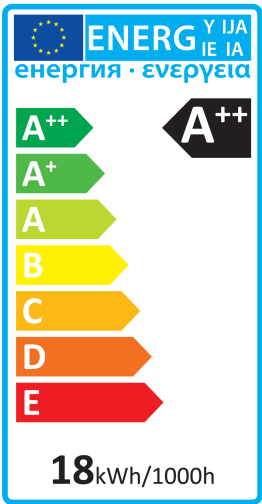

Technical Packaging Details

Barcode
23942527060
EAN 128
(02)00023942527060(37)04(91)803
EAN 14
50023942527065
Pack Dimensions(HxWxL)
33 x 33 x 1295 (mm)
Pack Weight
480 (g)
MOQ
4
Carton Dimensions (HxWxL)
85 x 85 x 1325 (mm)
Cartons/Pallet
80
Layers/Pallet
10
Units/Pallet
320

04/03/2016